

Instruction for Use KL02/IFU-A1

⁰¹ Product Description

Product Name	:	Powdered Sterile Latex Surgical Gloves
Material	:	Natural Rubber Latex
Colour	:	Creamy white
Shape	:	Anatomic
Cuff	:	Beaded
External Surface:		Textured
Internal Surface :		Powdered
Size	:	6.0, 6.5, 7.0, 7.5, 8.0, 8.5
Sterilization	:	Ethylene Oxide (EO) / GAMMA (R)
Shelf Life	:	5 years

02 Intended Use

This disposal medical device is made up of natural rubber latex which is anatomically shaped with thumb position towards the Palm side of the index finger which reduces the fatigue on the hands, intended to be worn on the hands usually in surgical settings to provide barrier against potentially infectious fluids and other contaminants.



Medical Device Classification : Class IIa, Rule#06

Conformity assessment route : Annex II section 4 of council directive 93/42/EEC

:2460

:

: DNV Product Assurance As

Regulatory Authority

Notified Body Number

Standard Compliance

EN 455-1:2020, EN 455-2:2015, EN 455-3: 2015, EN 455-4: 2009, EN ISO 15223-1:2021, EN 1041:2013, EN 566-1:2001, EN ISO 11135: 2014/A1:2019, EN ISO 11137-1:2015/A2:2019, EN ISO 11737-1:2018/A1:2021, EN ISO 11737-2:2020, ISO 11607-1:2019, ISO 11607-2:2019, EN ISO 10993-1:2020, EN ISO 10993-5:2009, EN ISO 10993-7:2008, EN ISO 10993-10:2021, EN ISO 10993-11:2017, EN ISO 10993-23: 2021, ISO 10282: 2014, ASTM D 3577: 2019, ISO 13485:2016, ISO 14001:2015, ISO 9001: 2015, IS 13422.

04 Storage Instruction

Gloves must be stored in cool dry environment which is dust free. Cartons and Boxes must be stored unopened until required. Recommended storage temperature is 5°C-35°C. Avoid exposure to direct light, heat and excessive humidity.

Kaltex

As ozone is deleterious, storage area should not contain any equipment capable of generating ozone such as ultraviolet light, fluorescent lights, mercury vapour lamps, photocopier, high voltage equipment, xray units, electric motors and electro surgical equipments.

05 Indication For Use

- After donning remove powder by wiping gloves thoroughly with a sterile wet sponge, sterile wet cloth / other effective aseptic method.
- Protective gloves should only be used for the intended application and in the correct size.
- These are sterile gloves for single use only.
- Isers should take care when using the gloves. Using them solely according to their intended application.
- Before usage, inspect the gloves for any defect or imperfection.

06 Contraindication

- Latex gloves are made of Natural rubber latex, which may cause allergic reactions including anaphylaxis response if the user is allergic to latex.
- Gloves contain Natural Latex; persons who are sensitive to Latex should consult a physician before using.
- Latex Surgical Gloves Powdered contain Powder content, persons who are sensitive to powder may develop allergy.



Instruction for Use KL02/IFU-A1

07 Precautions


- To not use package is damaged or wet.
- Risk of reuse: May cause infection, allergic reaction and poor barrier protection.
- Gloves shall not be worn where there is a risk of entanglement by moving parts of machines is needed.
- The results do not reflect the actual duration of protection in the workplace due to other factors influencing the performance, such as temperature, abrasion, degradation etc.

08 Warnings

- Device disposal should be done as per local regulatory norms.
- To not re-sterilize.
- The product contains Natural Rubber Latex which may cause allergic reactions including anaphylactic responses to some individuals.
- The gloves not intend to prevent Electrical shock care should be taken to have proper earthing in Medical Device Electrical appliances user.
- Provide the second s

09 Directions for use

Glove Opening and Donning Procedure :

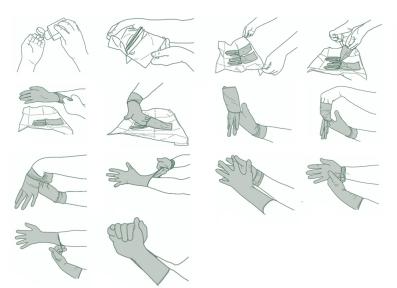

Remove the walleted gloves (inner wrapper) from the Pouch (outer wrapper) by Tear down along the 'V' cut for Plastic Pouch (Tear down to open pouch).

Kaltex

- ^{ce} Open the walleted glove to see "Left" and "Right" compartment.
- Pinch back upper and lower flaps of the inner wrapper.
- ^{cr} Using the middle flaps, open the wrapper touching only the 1 inch margin for safety.
- Be sure wrapper does not close over gloves after opening to avoid contamination.
- ^{cond} Using the thumb and the first two fingers of the nondominant hand, pinch the cuff of the folded edge of the glove cuff for the dominant hand, touching only the inside surface of the glove.
- Slide dominant hand in to the gloves keeping hand point downwards and pull up to wrist.
- Using the glove hand insert the 4 fingers under the cuff of the other glove and pull the glove up to the arm.
- The gloves as necessary.

Glove Removal Procedure :





- Take hold of the first glove at the wrist.
- Fold it over and peel it back, turning it inside out as it goes. Once the glove is off, hold it with your gloved hand.
- To remove the other glove, place your bare fingers inside the cuff without touching the glove exterior. Peel the glove off from the inside, turning it inside out as it goes. Use it to envelope the other glove.

Kanam Latex Industries Private Limited 3/13F, West Peruvilai Road, Pallavilai, Nagercoil -629 003, Kanyakumari District, Tamil Nadu, India. Email : customercare@kanamlatex.com



Instruction for Use KL02/IFU-A1

Kaltex

10 Personal Protective Equipment					
EN ISO 374-1/Type A EN ISO 374-1/Type B EN ISO 374-1/Type C					
			Ĩ		
UVWXYZ XYZ TYPE A Permeation min. 6 chemicals, level 2 (table 1) TYPE B Permeation min. 3 chemicals, level 2 (table 1) TYPE C Permeation min. 1 chemical, level 1 (table 1)					
Protective gloves protecting from viruses, bacteria and fungus					
VIRUS EN ISO 374-5-2016					
Protective gloves protective	cting from	ı bacteria	and fungus		
Table 1	Perform	ance Lev	rel		
Chemicals A Methanol	Time >10 mi	Prote	ction index		
B Acetone	>30 mi		2		
C Acetonitrile	>60 mi		3		
D Dichloromethane	>120 m		4		
E Carbon disulphide F Toluene	>240 m		$\frac{5}{6}$		
G Dimethylamine	- 1 00 II		0		
H Tetrahydrofuran					
I Ethyl acetate					
J n-Heptane					
K Sodium hydroxide 40% L Sulphuric acid 96%					
M Nitric acid 65%					
N Acetic acid 99%					
O Ammonium hydroxide 25%					
P Hydrogen peroxide 30%					
S Hydrofluoric acid 40%					
T Formaldehyde 37%					
EN ISO 374-1/Type C In Compliance with the Harmonized Standards Personal Protective Equipment, risk category III under Regulation (EU)2016/425					
EN ISO 21420 : 2020					
EN ISO 21420	: 2020				
EN ISO 374-5:2016 EN ISO 21420 EN ISO 374-1	: 2020 : 2016				
EN ISO 374-5:2016 EN ISO 374-1 EN 374-2:2014	: 2020 : 2016				
EN ISO 374-5:2016 EN ISO 374-7:2014 EN 374-2:2014 EN 374-2:2014 EN 16523-1:2	: 2020 : 2016 015				
EN ISO 21420 EN ISO 374-5:2016 EN ISO 374-1 EN 374-2:2014 EN 16523-1 : 2 EN 374-4 : 201 EN ISO 374-5:	: 2020 : 2016 015 3				
EN ISO 21420 EN ISO 374-5:2016 EN ISO 374-1 EN 374-2:2014 EN 16523-1 : 2 EN 374-4 : 201 EN ISO 374-5: Regulatory Aut	: 2020 : 2016 015 3 2016 hority :	SGS Fimł	co Oy		
EN ISO 21420 EN ISO 374-5:2016 EN ISO 374-1 EN 374-2:2014 EN 16523-1 : 2 EN 374-4 : 201 EN ISO 374-5:	: 2020 : 2016 015 3 2016 hority :		co Oy		
EN ISO 21420 EN ISO 374-5:2016 EN ISO 374-7:2014 EN ISO 374-1:2 EN 16523-1:2 EN ISO 374-4:201 EN ISO 374-5: Regulatory Aut	: 2020 : 2016 015 3 2016 hority : Number :		so Oy]		
EN ISO 21420 EN ISO 374-5:2016 EN ISO 374-1 EN 374-2:2014 EN 374-2:2014 EN 16523-1 : 2 EN 374-4 : 201 EN ISO 374-5: Regulatory Aut Notified Body I	: 2020 : 2016 015 3 2016 hority : Number : xide 40%	0598	co Oy		

11 Explanation of Symbols

- EC REP Authorized representative in the European Community AMSTERMED B.V., Saturnusstraat 46-62, Unit 032, 2132 HB Hoofddorp, The Netherlands
- \mathbb{N} Date of Manufacture
- Ω Use by date
- LOT Lot No
- SN Serial Number
- **CE** 2460 CE Logo
- **STERILE**EO Sterilization using Ethylene oxide
- **STERILE** R Sterilization using Irradiation
 - Do not re-sterilize
 - Do not use package is damaged or wet
 - **杰** Keep away from sunlight
 - Keep dry
 - <u>35°C</u> Temperature limit
- This way up or end up
- Ò Keep away from Ozone
 - Single Use
- li

LATEX

- Instruction for Use
- Caution
 - Latex Caution

Kanam Latex Industries Private Limited 3/13F, West Peruvilai Road, Pallavilai, Nagercoil -629 003, Kanyakumari District, Tamil Nadu, India. Email : customercare@kanamlatex.com